
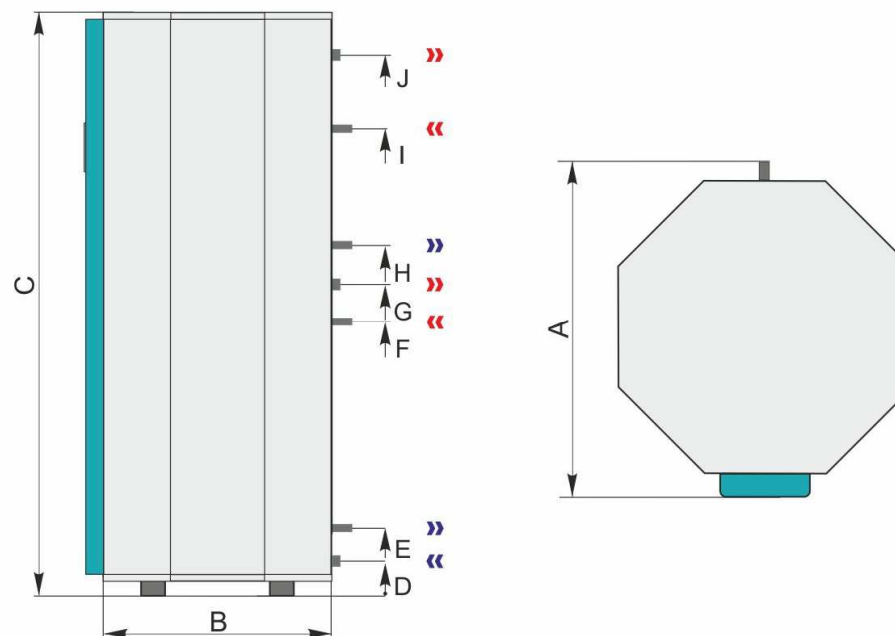


Regulacijska ploča

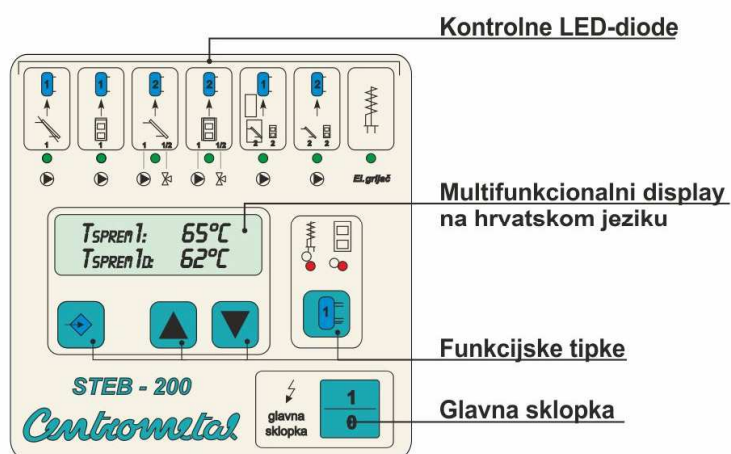

STEB		200		300		600	
Volumen	(l)	200		300		600	
Ogrjevna spirala		gornja	donja	gornja	donja	gornja	donja
Trajni učin ⁽¹⁾ 80°C	(kW)	16,6	33,1	19,7	43,3	31,6	82,9
	(l/h)	408	814	486	1066	778	2045
70°C	(kW)	13,3	26,7	16,0	35,0	25,5	60,3
	(l/h)	330	658	393	862	629	1554
60°C	(kW)	8,3	16,5	9,5	21,6	15,8	39,0
	(l/h)	204	406	243	532	389	962
Ogrjevna površina	(m ²)	0,42	0,84	0,5	1,1	0,8	2,1
Volumen ogrjevne vode	(l)	1,9	3,8	3,0	5,9	4,4	8,8
Protok kotlovske vode	(m ³ /h)	1,5		1,5		1,5	
Dimenzije bojlera A x B x C	(mm)	710 x 580 x 1400		760 x 640 x 1890		925 x 820 x 2005	
Visine (D / E / F / G)	(mm)	90 / 330 / 730 / 810		100 / 300 / 870 / 970		100 / 360 / 1010 / 1110	
Visine (H / I / J)	(mm)	895 / 1090 / 1180		1070 / 1340 / 1650		1210 / 1610 / 1750	
Polazni/povratni vod - kotl. krug	φ(mm)	22		28		28	
Polazni/povratni vod - sol. krug	φ(mm)	22		28		28	
Max. radni pretlak	(bar)	6		6		6	
Električni grijač	(W)	1 x 2000		1 x 3000		2 x 2000	
Masa bojlera	(kg)	80		120		230	

⁽¹⁾ ulazna temp. ogrjevnog medija 80, 70, 60°C; PTV 10/45°C